

Frommelt Flexible Strip Doors



NEW!
Prepunched,
Perforated Rolls-
For Faster
Installation.

PVC Workcells ◊ Hardware ◊ Custom Enclosures



Frommelt Safety Products

"Leaders in Area Protection"

www.frommeltsafety.com

Complete Lineup of Strip



Frommelt strip doors are ideal for use as an economical cooler or freezer door. USDA approved.



Invest in "Rib-Shield" and increase the life span of your doors.



FROMMELT SAFETY FLEXIBLE STRIP DOORS are designed and manufactured for your specific application. They have proven to be an excellent low cost barrier and solution for effective cost environmental separation.

Available in a wide range of strip widths, thicknesses and overlaps; multiple temperature ratings, and several mounting options.

Benefits:

Energy savings through temperature retention and controlled air flow.

Improved work environment resulting from improved maintenance of ambient temperatures, draft reduction and pest control.

Less maintenance due to blocking out wind, weather, dirt and debris.

Reduced noise levels up to 15db.

Increased productivity and safety as a result as a result of unrestricted traffic flow and excellent visibility.

Versatility allows motorized and personnel traffic to pass through same doorway by utilizing various strip widths.

FROMMELT-MADE PVC STRIP DOORS ADAPT TO MANY APPLICATIONS

- Plant floor doorways
- Manufacturing cell/operations doorways
- Conveyor operations openings
- Loading Docks
- Rail cars
- Low-temperature/USDA facilities
- Many more

NEW- FROMMELT SAFETY "RIBBED-SHIELD" STRIP DOORS

Vertical ribs impregnated into the PVC increases longevity and reduces scratching.

- Maintain clear visibility equals increased safety
- Scratch resistant
- Same mounting hardware options
- Pre-punched, pre-perforated rolled available for fast installation
- Available in standard 0° to 150°F and low temperature -30° to 120°F

Roll-up Doors and Enclosures

NEW - ROLL DESIGN

Frommelt Safety will ship your custom strips pre-punched and pre-cut to your desired length rolled-up.

Benefit: Fast installation, easily tear and hang on hardware.


TOTAL WORKCELL CONCEPT

Frommelt's "weld cell" combines our safety cell modular framework and amber strips to provide weld flash protection, fume containment and access via roll-up doors.

CUSTOM STRIP ENCLOSURES


Flexible PVC Transparent strips provide protection from harmful ultraviolet rays associated with welding.

- Improve plant aesthetics
- Unlimited access to manufacturing
- Maintain constant protection

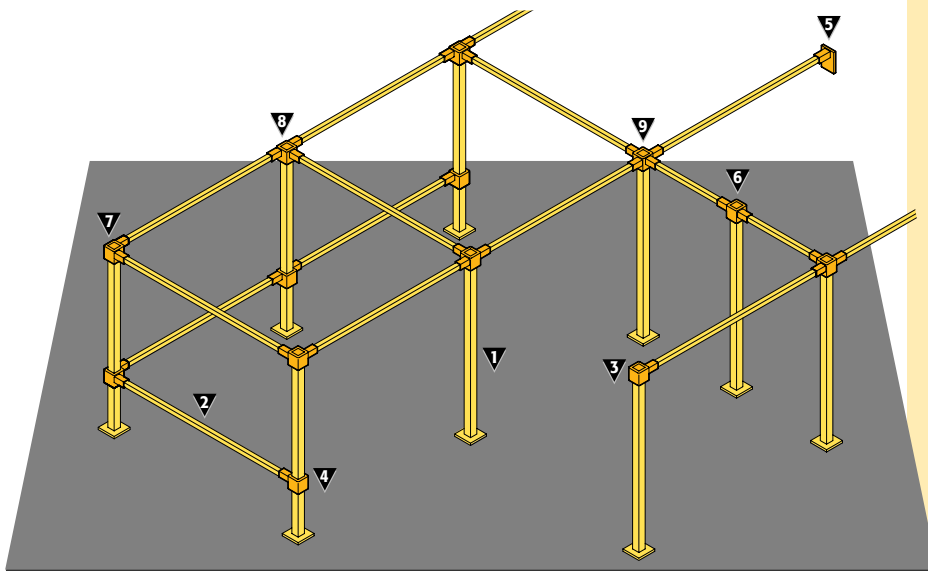

SAF-T-CELL

- Flexible floor mounted system
- Heavy duty framework
- Hang your strips and create your own modular workcell

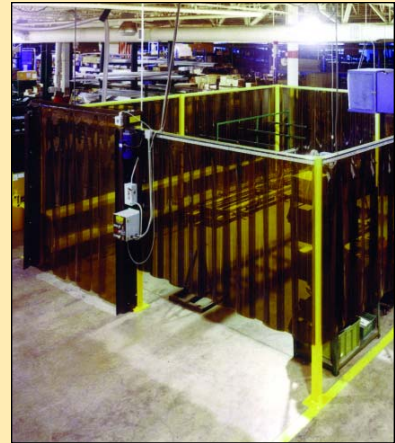

SPECIFICATIONS, RECOMMENDATIONS AND ORDERING INFORMATION

The information on this page will help you define your PVC strip door needs and specifications enabling you to choose the right material and hardware for the task at hand. Should you require

additional assistance, don't hesitate to contact your local Frommelt Safety representative. Or, contact the Frommelt factory directly utilizing the phone and fax numbers indicated below.

MATERIAL SIZES AND SPECIFICATIONS (All are high-visibility CLEAR PVC)

	TYPE	SPECIAL FEATURES	STRIP WIDTH	STRIP THICKNESS	MAXIMUM RECOMMENDED DOOR HEIGHT	
Standard Temperature 0°F to 150°F Specify material: ST	Smooth		6"	.060"	7'	
			8"	.080"	10'	
			12"	.120"	14'	
	Reinforced		16"	.160"	18'	
		Ribbed*		8"	.080"	10'
				12"	.120"	14'
	16"		.160"	18'		
Low Temperature -30°F to 150°F Specify material: LT	Smooth	USDA	6"	.060"	6'	
		USDA	8"	.080"	8'	
		USDA	12"	.120"	12'	
		USDA/Reinforced	16"	.160"	16'	
	Ribbed*	USDA	8"	.080"	8'	
		USDA	12"	.120"	12'	
USDA		16"	.160"	16'		
Extra Low Temperature -60°F to 120°F Specify material: ELT	Smooth	USDA	8"	.080"	10'	
		USDA	12"	.120"	14'	


*Ribbed surfaces are 2" apart on both sides and are offset by 1/2"
NOTE: For maximum wear maintain 18" from highest load to top of strip door

(additional lead time may apply)

8" width/.080" thick or
12" width/.120" thick Anti-Static

AVAILABLE FOR SPECIAL ORDER: 8" width/.080" thick Red or Black Opaque


PVC STRIP MATERIAL PERCENTAGE OVERLAP PATTERNS

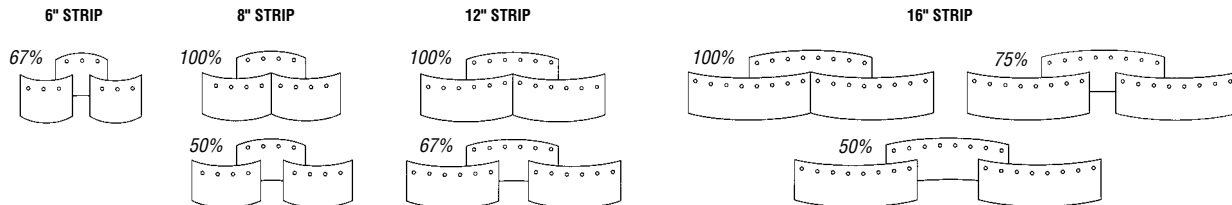


TYPES OF MOUNTING BARS

UNIVERSAL MOUNTING BRACKET
Available in galvanized, aluminum or stainless steel


Header Mounting




Surface Mounting




INSIDE OVERHEAD DOOR MOUNT
Available with:
12", 18" or 24" extension brackets




NON-RISE SWINGING HINGE MOUNT
(Includes pull cord and center deadbolt)
Available in double door openings of:
6', 8', 10' or 12'



SURFACE HINGE MOUNT



SURFACE SLIDING MOUNT
(Includes track, track connectors and strip door trolley)



Frommelt™
SAFETY PRODUCTS

4343 Chavenelle Drive
Dubuque, Iowa 52002-2654
Toll Free: 800-553-5560
Phone: 563-587-4401
Fax: 563-589-2776

Visit our Web Site at:
<http://www.frommeltsafety.com>

1-04 Litho in U.S.A.

